

DRT-320T/W

Product Advantages

Operating table **easy to use**

Briggs Stratton EPA
13.5HP engine

2 pumps & 2 valves

Automatic
Bucket Leveling

Bucket can be replaced
by **various attachments**

Operating weight 840 kg,
lightweight and flexible

Thin wheel version
has a total width
of **830mm**.



Wide wheel version has a
total width of **1050mm**.







DRT-320T/W

Product Parameters


Engine	Briggs Stratton
Rated Power	10KW(13.5HP)
Fuel tank capacity	6.6L
Rotating speed (rpm)	3600
Noise (Db)	≤95

Item	Metric	U.S.
Bucket Capacity	0.08 m ³	3 ft ³
Max Lifting Force	320 Kg	705 Lb
Travel Speed	0-6 Km/h	0-3.73 mile/h
Operating Weight	920 Kg	2204.62 Lb

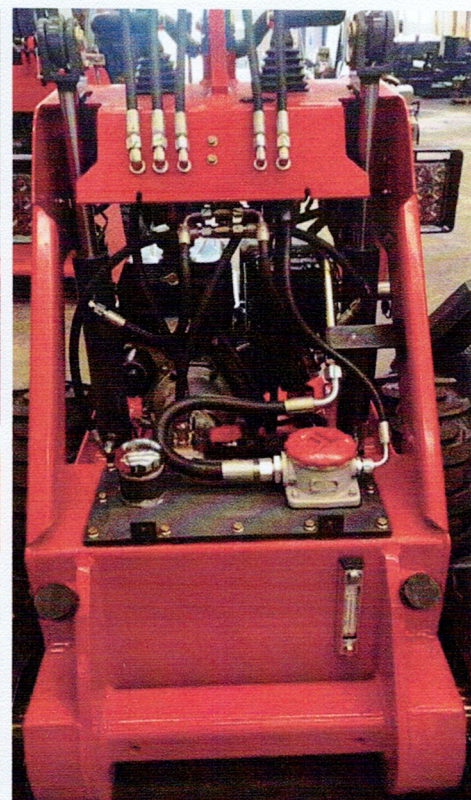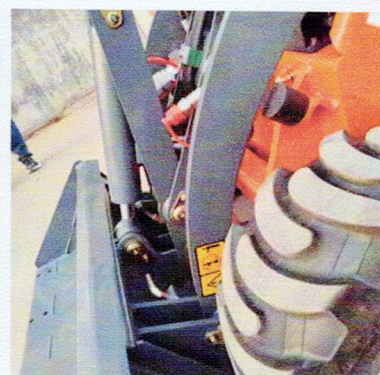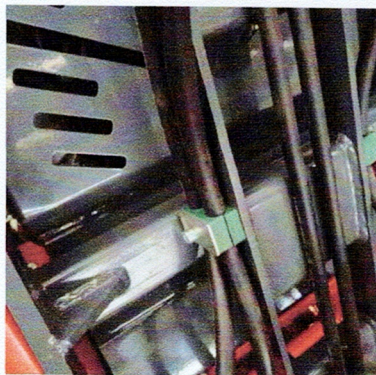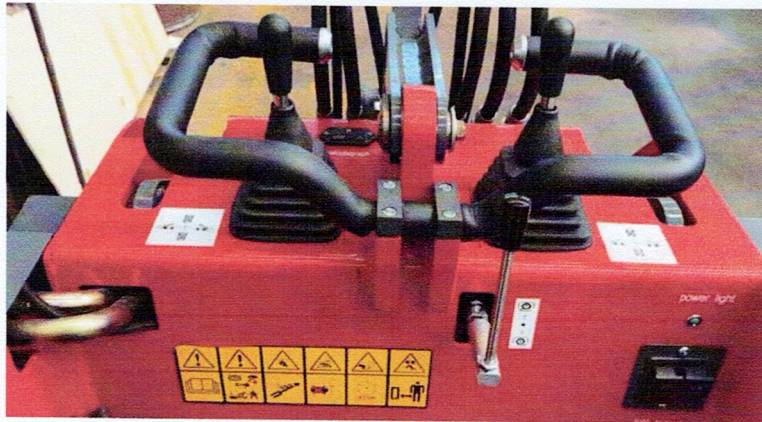

DRT-320W

Product Parameters

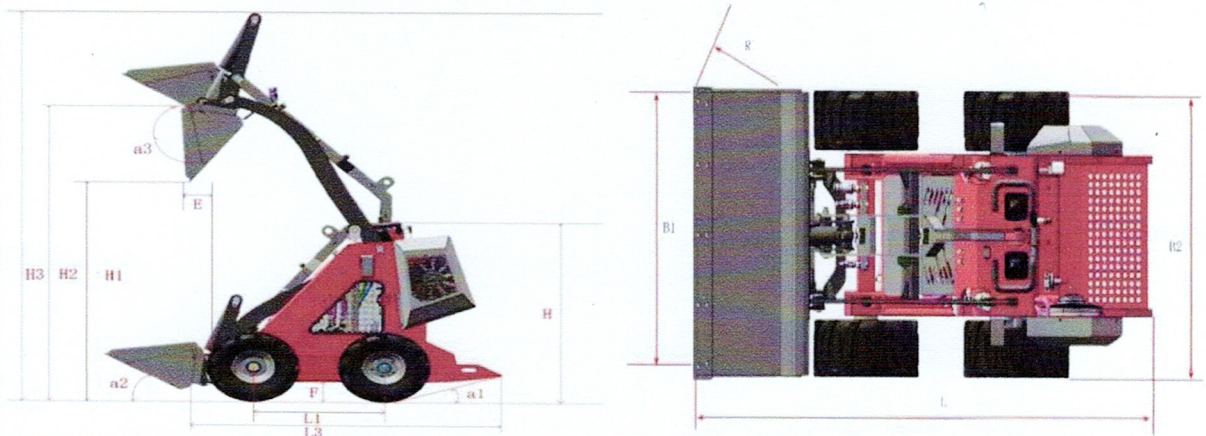

Wheel Vision	Metric	U.S.
Max working height (H3)	2504 mm	98.58 inch
Max pin height(H2)	1951 mm	76.81 inch
Max Dumping height (H1)	1423 mm	56.02 inch
Max Dumping distance(E)	100 mm	3.94 inch
Max Dumping Angle (a3)	53°	53°
Rollback of bucket on ground (a2)	32°	32°
Departure angle (a1)	18°	18°
Total height (H)	1210 mm	47.64 inch
Ground clearance (F)	133.5 mm	5.26 inch
Wheel base (L1)	653 mm	25.71 inch
Overall length without bucket (L3)	1552 mm	61.1 inch
Total width (B2)	830mm/ 1050 mm	32.68inch/41.34 inch
Bucket width (B1)	1080 mm	42.52 inch
Total length with bucket (L)	1992 mm	78.43 inch
Turn radius forward turning (R)	1205 mm	47.44 inch