

DRT-450T

Product Advantages

Hydraulic Oil Radiator, separated from the engine.

Iron Pipes, increase using life, improve heat dissipation performance.

Triangle-shaped Tracks, small grounding pressure.

Automatic Bucket Leveling.

Spring Tensioning Design of the front guide wheel, better impact resistance.



Oil Tank arranged above the engine, absorb sufficient oil and the rotation speed is stable.

Control Panel with brushed stainless steel etching process, high end and high class.

Engine Guard, protect the engine.

More **Supporting Wheels** than peer products.

Foot Pedal with cushioning device, non-slip design and can be folded upward.

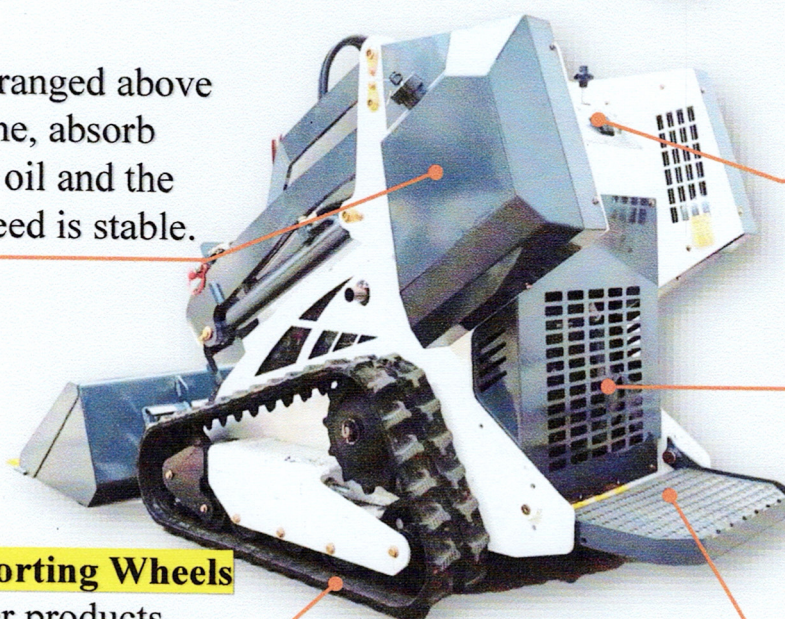
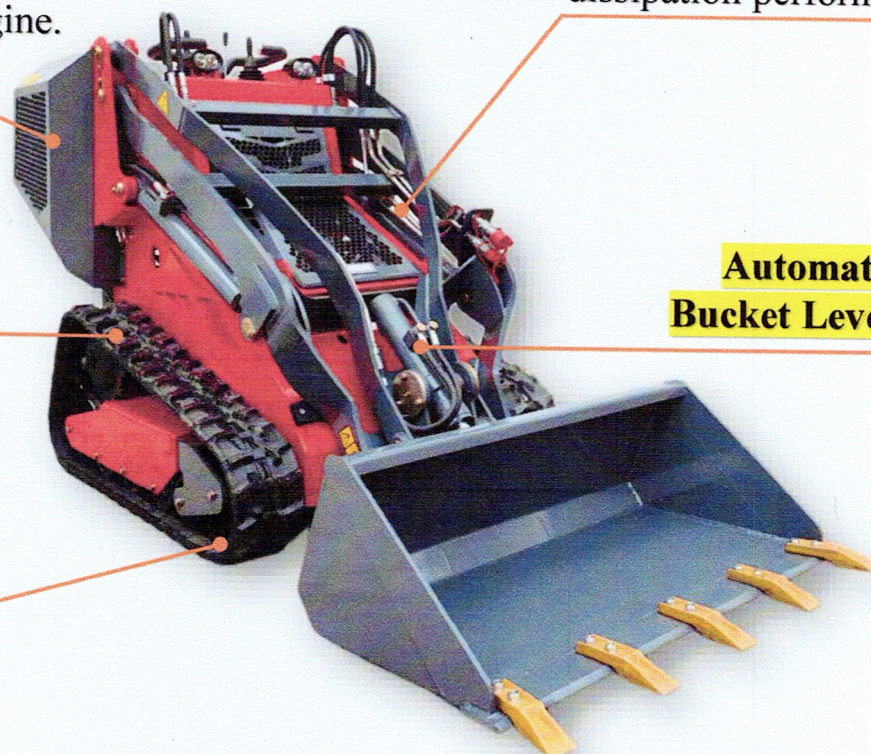


DRT-450T

Product Parameters


Engine Brand	Briggs & Stratton	Honda	Rato
Rated Power (KW)	18.2KW(23HP)	19KW(25HP)	19KW(25HP)
Fuel	Gasoline		
Number of cylinders	2		
Fuel tank capacity	20L		
Rotating speed (rpm)	3600		
Noise (Db)	≤95		

Item	Metric	U.S.
Bucket Capacity	0.13 m ³	4.59 ft ³
Max Lifting Force	450 Kg	992 Lb
Travel Speed	0-4.5 Km/h	0-2.80 mile/h
Operating Weight	1160 Kg	2557 Lb



DRT-450T

Product Parameters

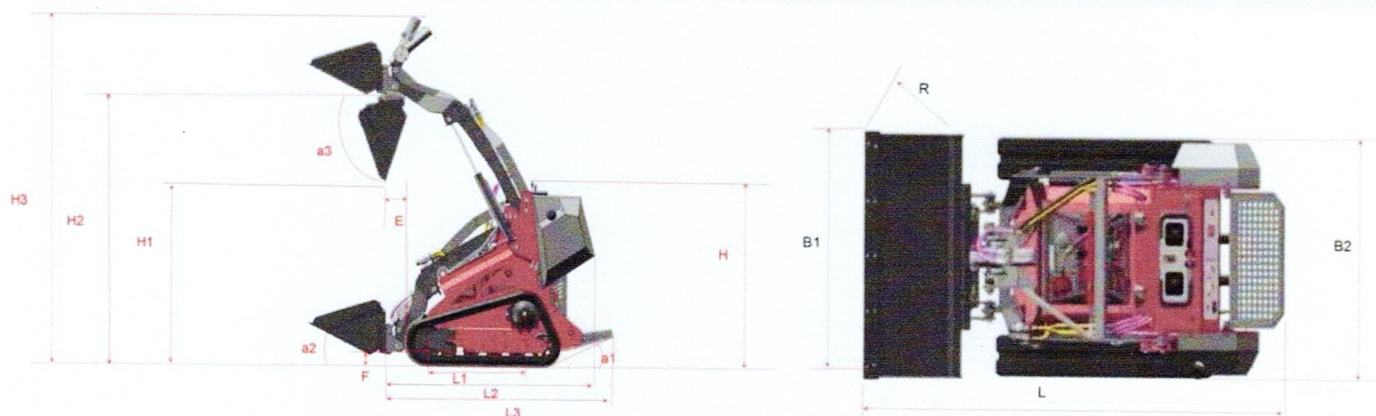

Track Vision	Metric	U.S.
Max working height (H3)	2474 mm	97.40 inch
Max pin height(H2)	1977 mm	77.83 inch
Max Dumping height (H1)	1275 mm	50.20 inch
Max Dumping distance(E)	175 mm	6.89 inch
Max Dumping Angle (a3)	70°	70°
Rollback of bucket on ground (a2)	25°	25°
Departure angle (a1)	23°	23°
Total height (H)	1300 mm	51.18 inch
Ground clearance (F)	120 mm	4.72 inch
Wheel base (L1)	890 mm	35.04 inch
Overall length without bucket (L3)	1767 mm	69.57 inch
Total width (B2)	1030 mm	40.55 inch
Bucket width (B1)	1070 mm	42.13 inch
Total length with bucket (L)	2319 mm	91.30 inch
Turn radius forward turning (R)	1440 mm	56.69 inch