

DRT-V1000

Product Advantages



900 mm

Body width is 900mm, maneuver in narrow spaces freely.

2350 mm

Pin height is 2350mm, enable loading onto high-sided trucks.

185 mm

The undercarriage has a ground clearance of 185mm.

EPA & Euro V

Engine: British Perkins 403J or Japanese Kubota D902, 18.5KW.

ITA HANSA

Hydraulic system adopts Italian HANSA closed-loop system.

Pilot Control Handle

Allows single-handed, easy and precise control.

Foam Padding

Operator's position is equipped with foam padding to add comfort.

Bucket Float

When using sweeping attachment, can follow the ground's contours.

Water Cooling




Engine cooling is water-cooled, enabling the machine to work 24h.

DRT-V1000

Product Parameters

Engine Brand	Perkins 403J	Kubota D902
Rated Power (KW)	25HP	
Fuel	Diesel	
Engine Cooling	Liquid	
Number of cylinders	3	
Fuel tank capacity	25L	
Rotating speed (rpm)	2800	
Noise (Db)	≤95	

Item	Metric	U.S.
Bucket Capacity	0.18 m ³	6.36 ft ³
Max Lifting Force	454 Kg	1000 Lb
Travel Speed	0-5.8 Km/h	0-3.60 mile/h
Operating Weight	1538 Kg	3391 Lb

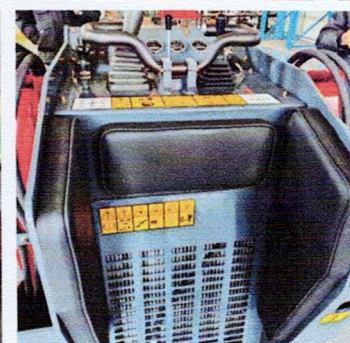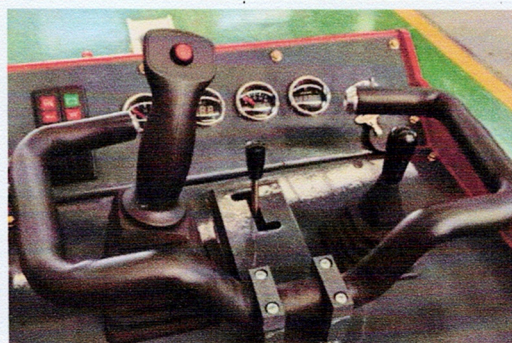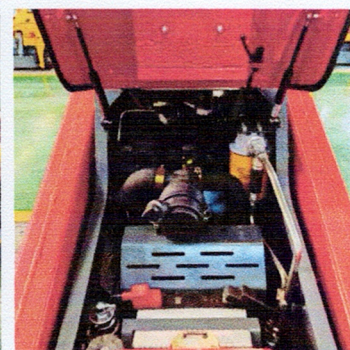

DRT-V1000

Product Parameters

